




- INSTRUCTIONS TO MOUNT FLU-CEC CABINET TO UPS:
1. REMOVE LEFT SIDE PANEL OF UPS AND SAVE HARDWARE.
  2. BUTT RIGHT SIDE OF FLU-CEC CABINET UP AGAINST THE LEFT SIDE OF THE UPS.
  3. BOLT THE CABINETS TOGETHER AT (6) LOCATIONS WITH THE SUPPLIED 5/16 HARDWARE THRU THE SLOTS NOTED AS "A" BELOW.
  4. MOUNT LEFT SIDE PANEL OF UPS ON THE LEFT SIDE OF THE FLU-CEC CABINET USING THE HARDWARE FROM THE UPS.

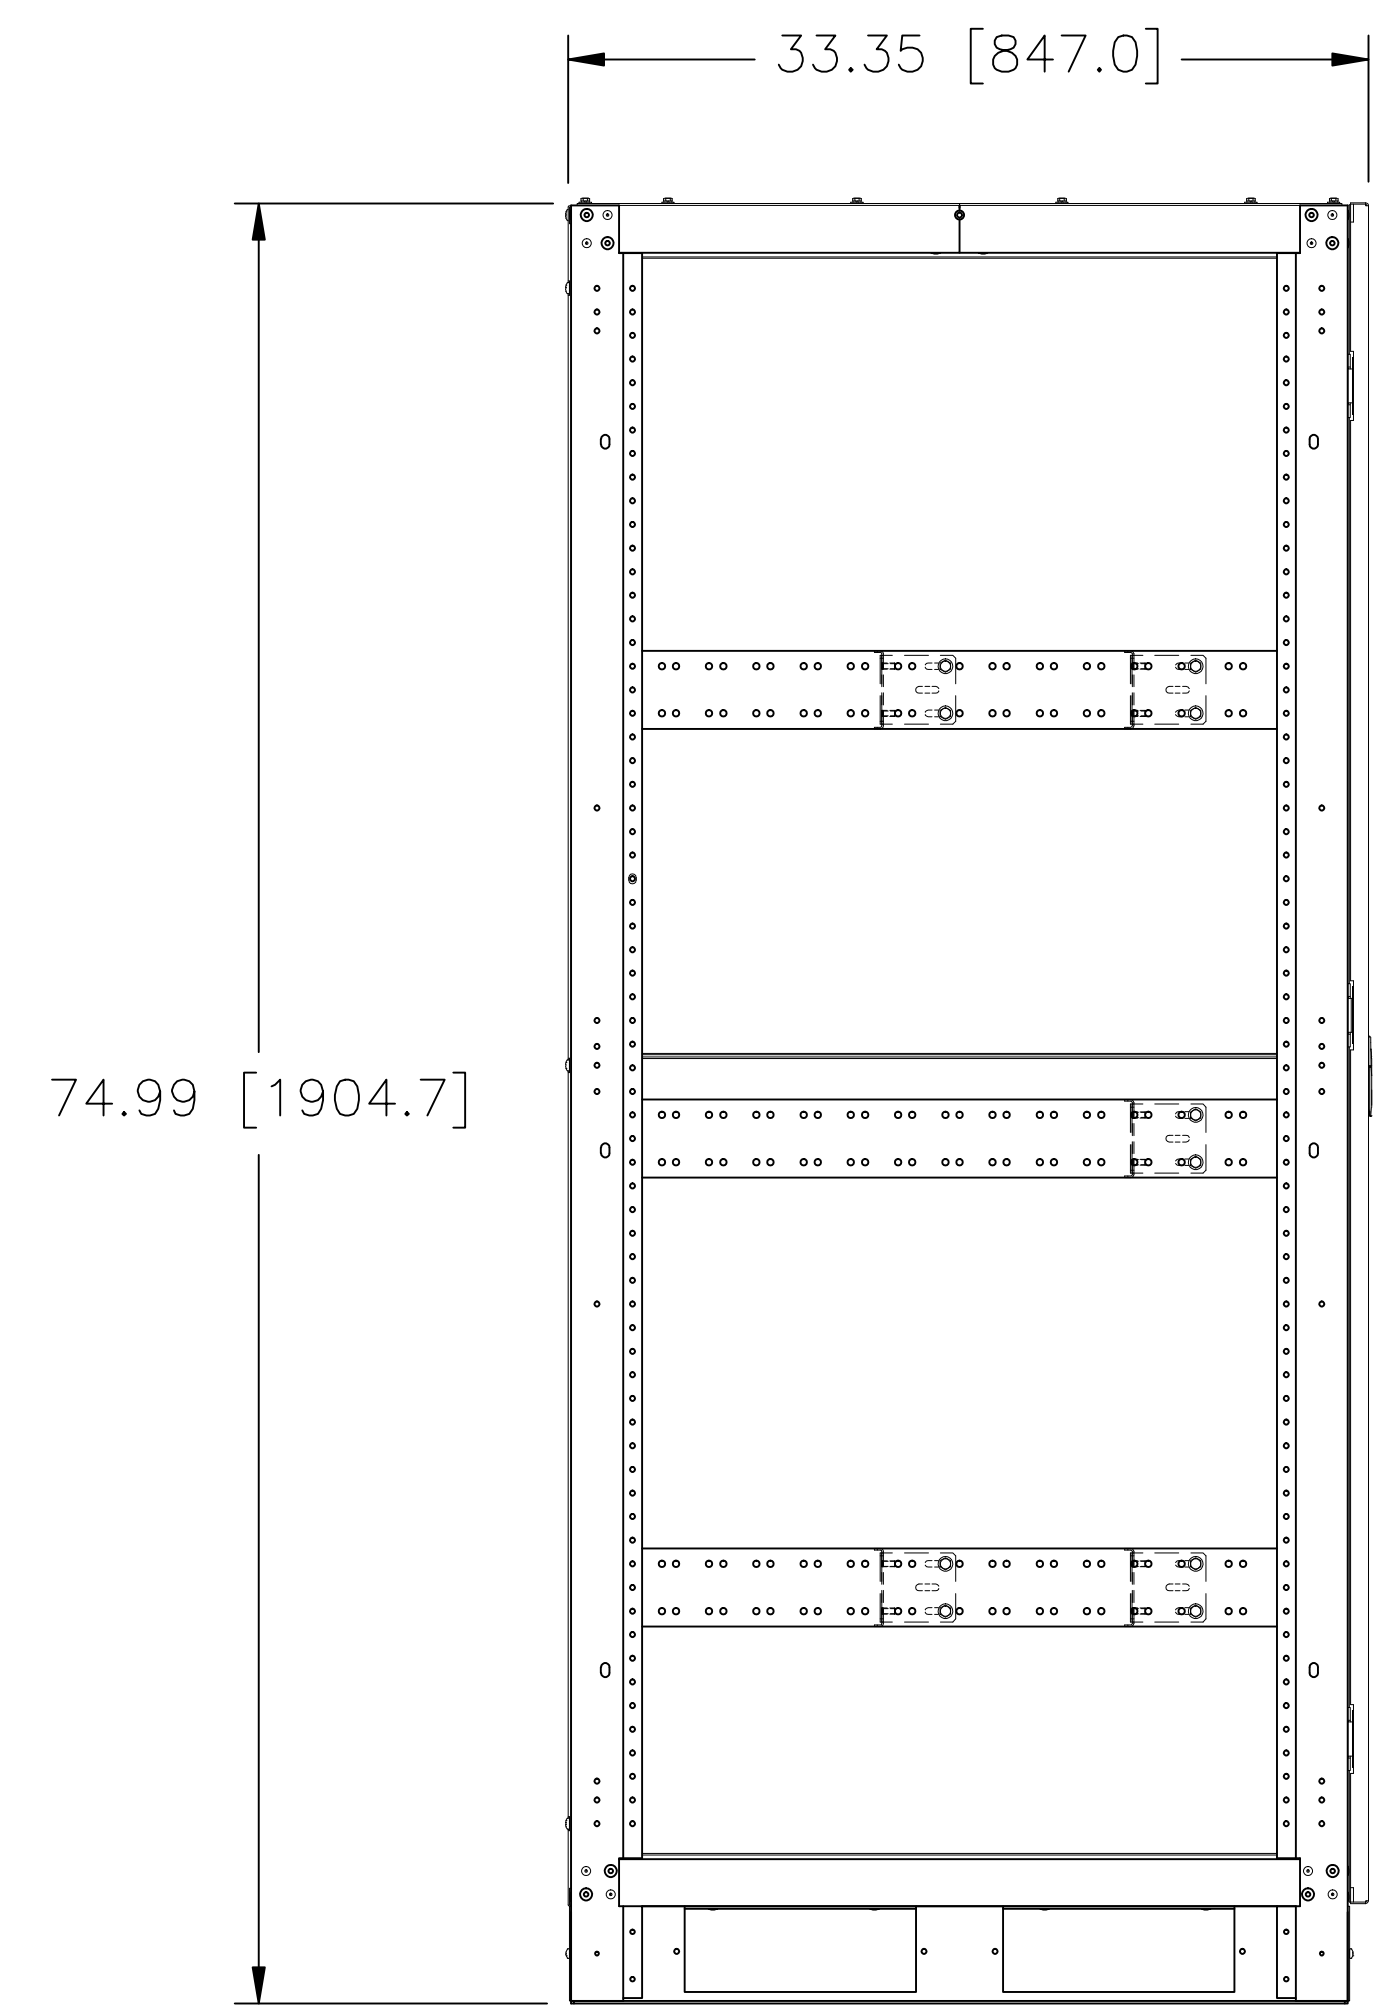


LEFT SIDE VIEW

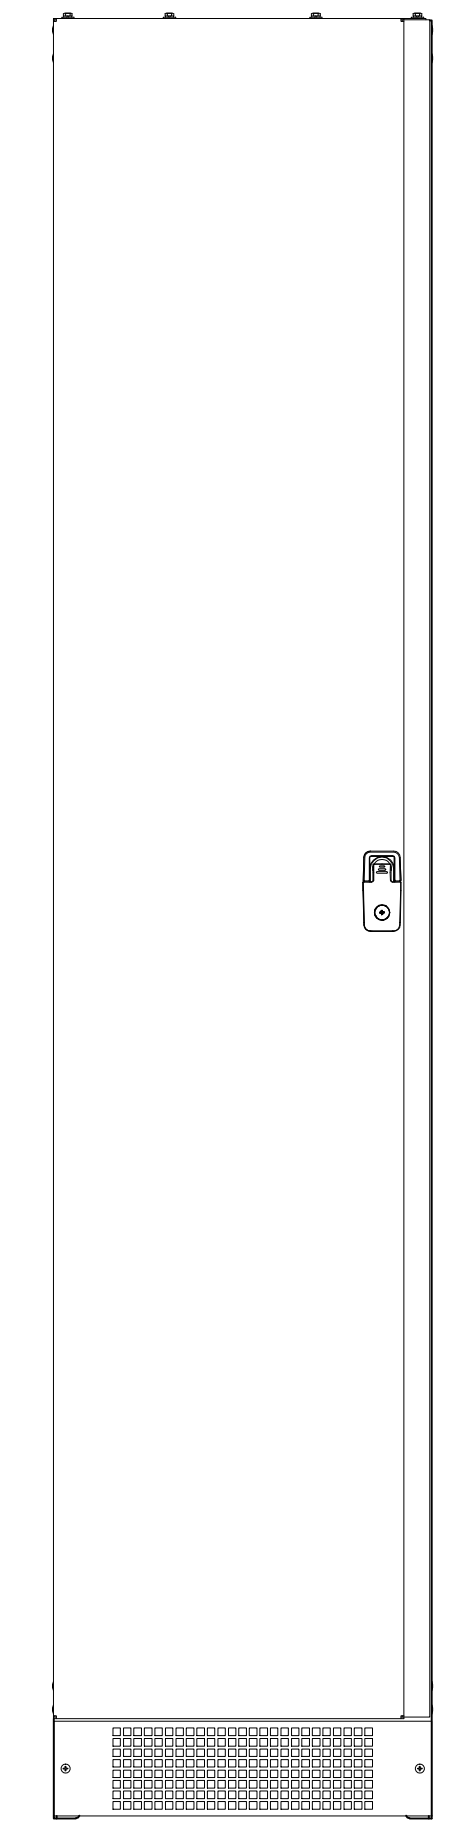


FRONT VIEW

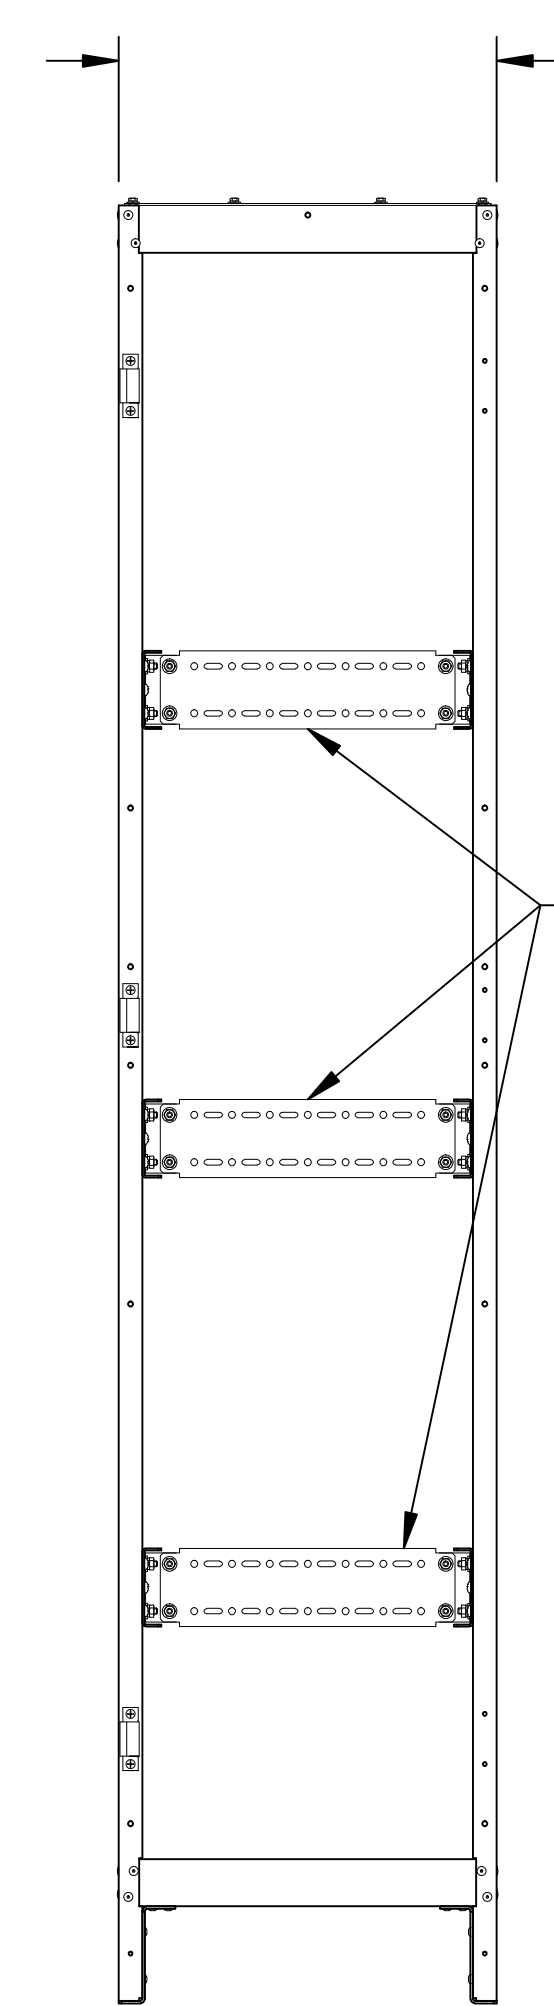

FRONT VIEW  
FRONT DOOR AND  
KICK PANEL  
REMOVED

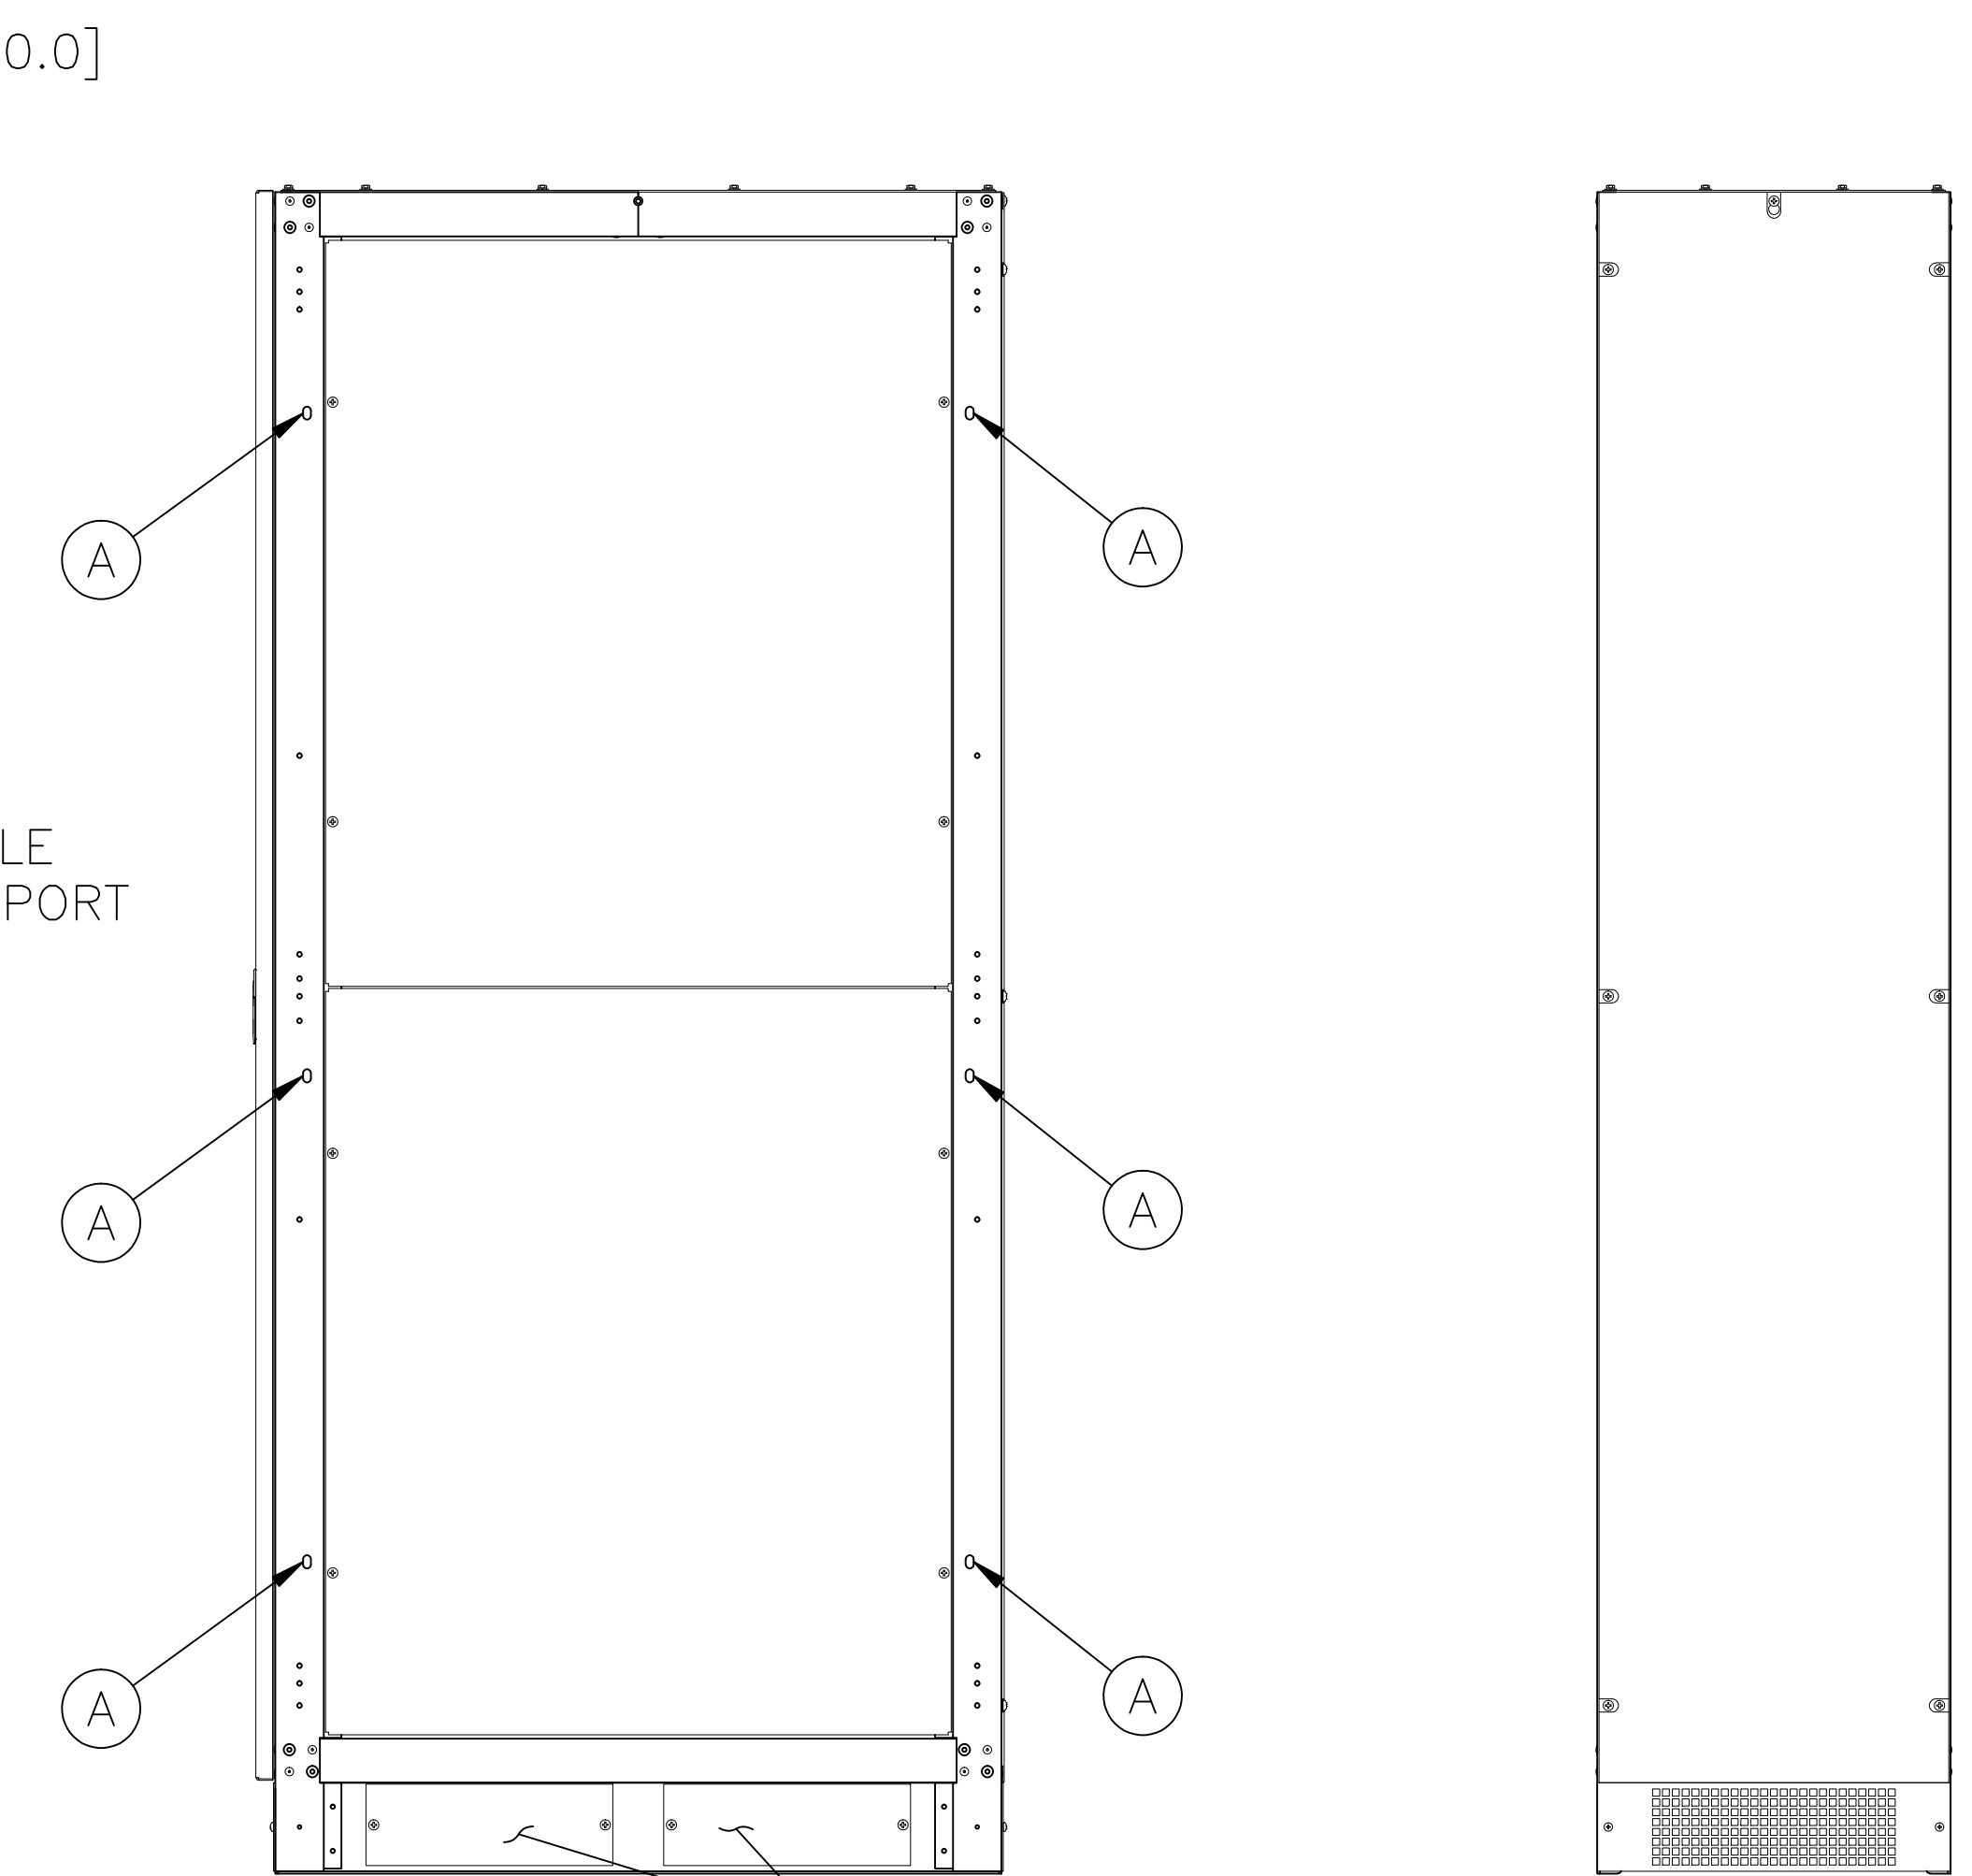

RIGHT SIDE VIEW  
CONDUIT LANDING PANELS  
.08 [2.0] THICK

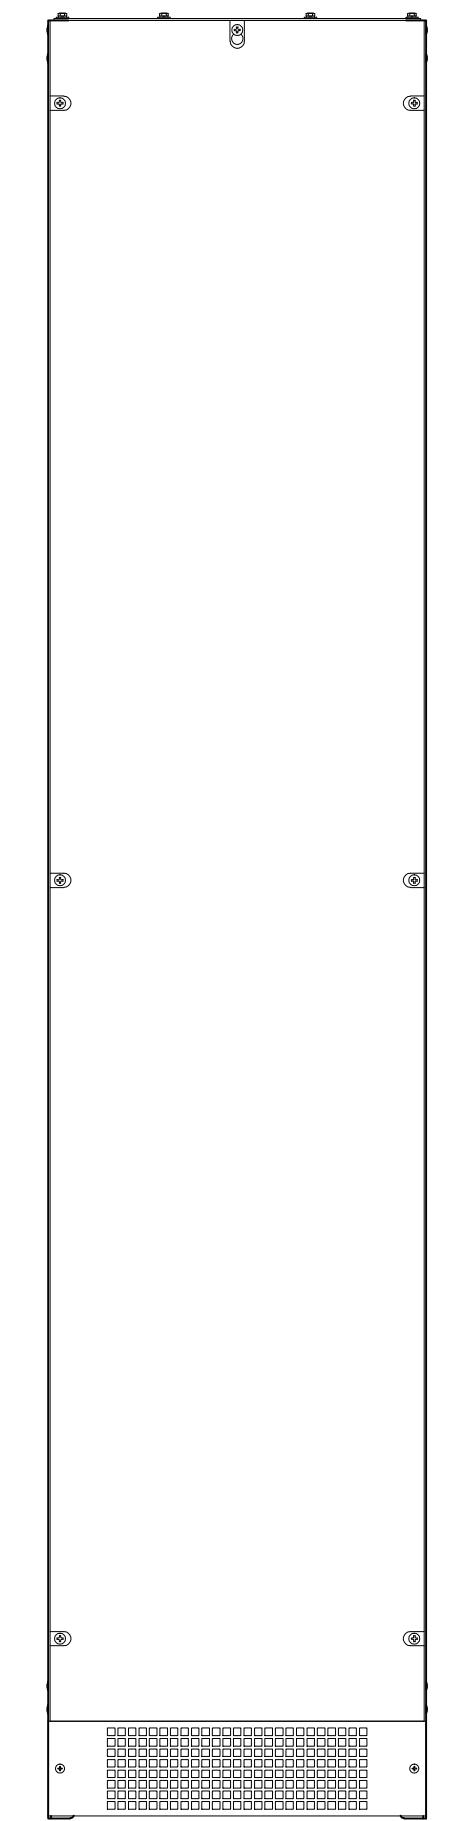

REAR VIEW

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS #				TITLES		
DECIMALS	HOLES	ANGLES	DRAFT	SPEC. CONTROL DRAWING		
.XX .010	.005	1°	1-1/2°	CABLE ENTRY CABINET		
.XXX .005				FLU-CEC		
MATERIAL:				DRAWN BY	DATE	FIRST USED ON
ALL DIMENSIONS APPLY AFTER PLATING				S.A. SMITH	10/19/10	DO NOT SCALE DWG.
<small>The information and design disclosed herein was originated by and is the property of STACO ENERGY PRODUCTS CO., which reserves all patent, proprietary, design, manufacturing, reproduction, use and sale rights therein, and to any article disclosed therein except to the extent rights are expressly granted to others. The foregoing does not apply to vendor proprietary parts.</small>				CHECKER	DATE	WEIGHT APPROX.
				SAS	2/23/11	83008
				ENGINEER	DATE	SCALE
				SAS	6/10/11	1/8
				CAGE CODE	SHEET 1 OF 1	
				DWG. NO.	096-6016	